

Real – Time Guard Tour System

Active guard 3.0

[ShareTweet](#)

NEW VERSION OF THE WELLKNOWN ALL OVER THE WORLD DEVICE – ACTIVE GUARD 3.0

Active Guard is the most advanced, **first of its kind in the world**, system for monitoring the time, place and results of the work of personnel. By combining benefits of GPRS communication and RFID reading Active Guard can be used as a **guard tour system, a personnel protection system and a voice communications device**. Active Guard ensures the ability to react immediately, which helps increase the safety and quality of work. It gives instant irregularity warning.



NEW, BETTER FUNCTIONALITY AND DESIGN

Built-in accelerometer

Man-down detection – notification about life-threatening of the user life threat

Excessive shock detection – notification about attempt destroying the device

Tilt detection with configurable positions and angles – notification about changing the position of device – alarm signal if the position is outside the defined range

Form optimization


More comfortable in use and more durable

Silicone gasket

Silicone gasket placed in special grooves in housing – for better durability and tightness

More screws

Better distribution of forces at the fall

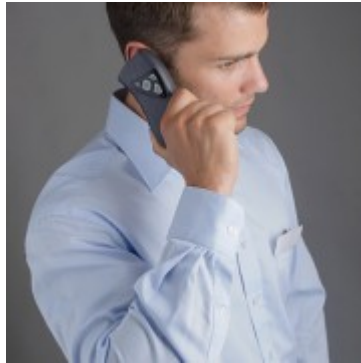

PANIC

RFID

ACTIVE
GUARD

NEW VERSION 3.0
REAL TIME GUARD TOUR SYSTEM
PERSONNEL PROTECTION SYSTEM
VOICE COMMUNICATION DEVICE

EBS
CREATING A SENSE OF SECURITY
SINCE 1989

The advertisement features a futuristic grey device on the left with a 'PANIC' button and a red target icon. On the right, a security guard in a uniform with a 'SECURITY' badge is shown. The background is dark blue with a starburst graphic containing the word 'RFID'. The product name 'ACTIVE GUARD' is in orange and white, followed by 'NEW VERSION 3.0' and its features. The EBS logo and tagline are at the bottom.

TECHNICAL DATA

Reader type	Proximity RFID
RFID reader frequency	125 kHz
RFID read-out distance	3-4 cm (depends on transponder type)
Transmission	In the real-time by GPRS/SMS
Alarm events buffer size	1000
Quantity of system events stored in history	5000
Timestamp event	YES (date, time with 0.01s accuracy)
GPRS/SMS transmission security	AES encryption
Device configuration	Remote: via GPRS, SMS, CSD Local: PC through RS232 link (LX-PROG cable and AGP programmer required)
Remote firmware update	YES
Supported modems	– Cinterion MC55i, MC55i-W (former Siemens) – Simcom SIM300D, SIM340D – u-blox Leon-G100, Leon-G200
Voice call support	YES
User interface	3 buttons (PANIC, CALL-ME, RFID readout)
Optical signalisation	YES (3 LEDs)
Sound signalisation	YES
Vibration	YES

Power supply	<ul style="list-style-type: none"> – main battery – lithium-ion polymer 3.7 V, 1600 mAh nominal capacity – backup battery – nickel metal hydride 3.6 V, 40 mAh nominal capacity
Main battery working time after charging	up to 2 days
Main battery charging time	max. 3 hours
Main battery charging current	max. 1 A
Power supply unit functions	<ul style="list-style-type: none"> -low battery voltage detection <ul style="list-style-type: none"> – fuse protection – detection of battery cover opening even after main battery discharge – backup battery allowing event registration (opening the housing and excessive shock) even after main battery discharge
Built-in accelerometer functions	<ul style="list-style-type: none"> – main-down detection with configurable pre-alarm time – detecting excessive shock that can cause damage <ul style="list-style-type: none"> – the tilt detector with configurable positions and angles
Weight	about 210 g
Dimensions	207 x 58 x 39 mm
Protection rating	IP67
Vibration resistance	10 – 500 Hz with acceleration to 3G for 2 hours



Realtime guard tour system

Thanks to RFID reader Active Guard allows to control guard tours on basis of RFIS tags placed on the round course. Monitoring software allows to establish timeframes for RFID tag reading. If no reading is recorded within specified time, the monitoring station notifies of irregularities.



Personnel protection system

PANIC button can be used in case of emergencies. When PANIC button is being pressed device send an emergency signal to the monitoring station to ask for help. It is possible to recorde the voice communication surrounding the device by the monitoring system communication and show the position of the device ifit is supported by GSM network



Voice communications deviceActive Guard allows also for GSM two-way voice communication. CALL ME button allows to send signal via GPRS to monitoring station to ask for relay (when it`s pressed shortly) or to call directly to authorized number when it is pressed longer (i.e. police, fire station, supervisor, etc.).It is also possible to call the device from authorized number at any time.



The tags (control points) in form of key fob or cointag can be can be fixed or mobile, can be easily programmed so as to provide appropriate messages after they have been read.

Resistance to destruction



Saving the data even in the case of total destruction of the reader.



Resistance to any kind of weather conditions (cold, moisture, heat).



Notification of all mechanical attempts to destroy device.



Detector, which allows to determine whether the device was exposed to strong electromagnetic fields e.g. the origin of microwave.



Higher reliability due to increased anti-sabotage security.

WHAT MORE OFFER AG:

Remoteconfiguration and firmwareupgrade – comfortable servicing and time savings

Encryption of transmitted data using AES cipher – full data transfer safety

Modem choice between three leading manufacturers – adapts the device to buyers personal preferences

Power down by button combination – feature enables to turn of the device in designated areas without necessity of housing opening

Increased event buffer capacity up to 1000 events – long lasting and easy device operation in areas with no GSM network coverage

System event history – evidence up to 5000 events enabling to diagnose causes of possible problems

Capability of adding a Bluetooth module – possibility to expand system by extra accessories (headset, GPS module)

Registered battery lid opening event after main battery discharge – increased anti-sabotage security

PROGRAMIRANJE VIDEO

